


3D-View

Turnable and zoom can be activated in Adobe Acrobat Reader under Windows

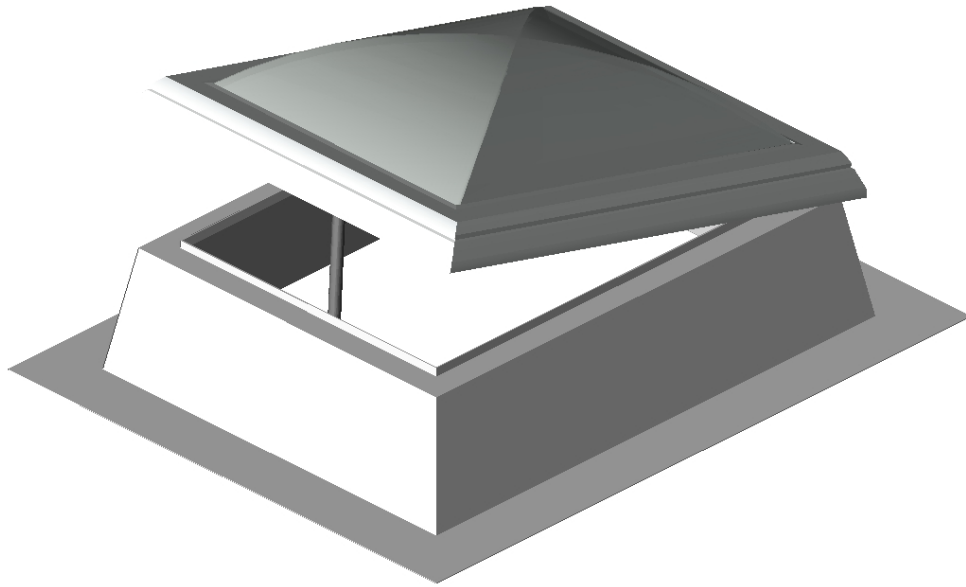

Edit configuration


This configuration can be edited using the following link:

[Open in configurator](#)

Product Features

Attribute	Value
ROOFLIGHT F100	
product ID	LA3 090/120 K30 LR SS LOD500
level of detail	LOD 500
	lower LOD value = simplified selection and reduced geometry
UPPER PART	
order size, top roof edge size (OKD) [cm]	90 / 120
clear dimension (LM) [cm]	72 / 102
exit hatch	no exit hatch
glazing	
heat transition U_t [W/m ² K]	1.8 - 2.0
material	dome plastics
transparency	opal
	triple glazing
UPSTAND	
type of upstand	GRP upstand
height [cm]	30
features	
better heat insulation upstand	no
suspension lip for storage of the roof line	no
PVC rail	no
heat insulated foot flange	no
DRIVE	
type of drive	230 V
type of drive	spindle drive
lifting height of the drive [mm]	300
YOUR CONFIGURATION HAS THE FOLLOWING QUALITIES	
OKD width	90 cm
OKD length	120 cm
LM width	72 cm
LM length	102 cm
height of upstand	30 cm
thermal transition U_t	ca. 1.8 W/(m ² K)
noise insulation level $R_{w,p}$	ca. 21 dB
light transmission τ	ca. 59 %
energy transmission g	ca. 59 %
opening devices	spindle drive
lifting height	300 mm
voltage	230 V
product standard	EN 1873
fall-through protection	no fall-through protection
construction material class upstand	E (according to EN 13501-1)
construction material class glazing	E, d0 (nach EN 13501-1)
hail resistance class	HW5 (according to VKF standard)

Dimensional Drawing

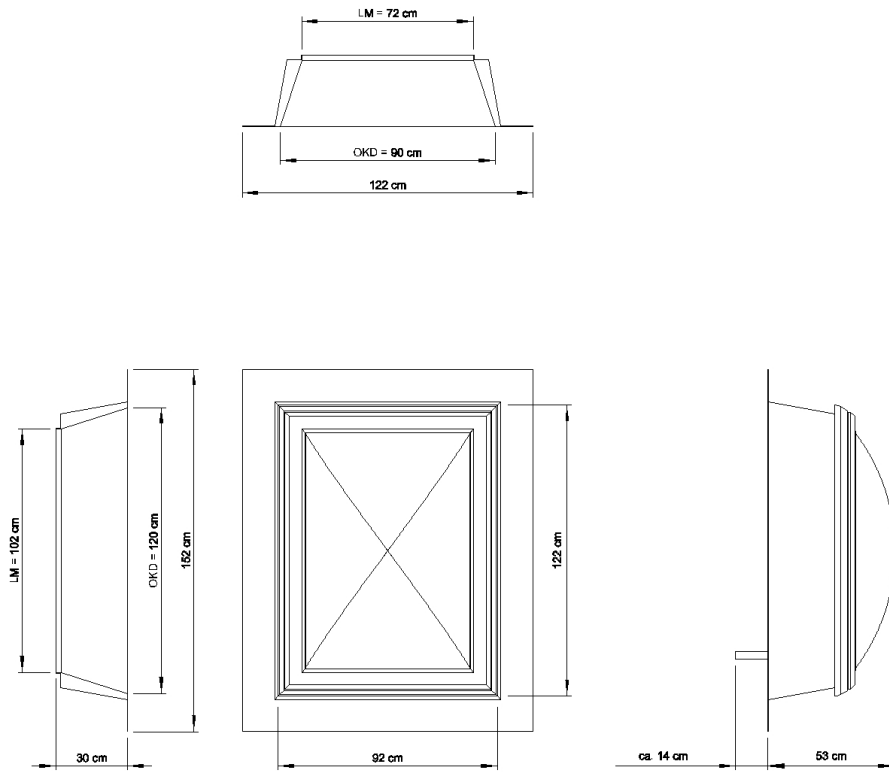

Attachments

Double-click a paperclip icon to open a file, or right-click to save it.