


3D-View

Turnable and zoom can be activated in Adobe Acrobat Reader under Windows

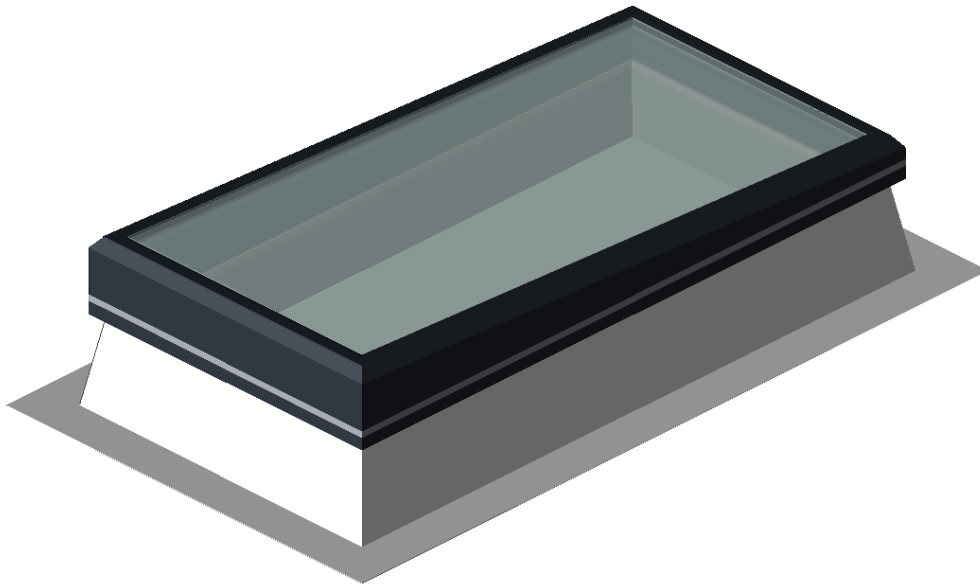

Edit configuration

This configuration can be edited using the following link:

[Open in configurator](#)

Technical Information

GLASS SKYLIGHT FE 3°



Product Datasheet

Product-ID: FE 3° W106 100/200 K30 LR RAL7016 S 0,68 SS LOD500

Product Features

Attribute	Value
GLASS SKYLIGHT FE 3°	
product ID	FE 3° W106 100/200 K30 LR RAL7016 S 0,68 SS LOD500
level of detail	LOD 500
	lower LOD value = simplified selection and reduced geometry
UPPER PART	
size	standard size
order size, top roof edge size (OKD) [cm]	100 / 200
clear dimension (LM) [cm]	82 / 182
exit hatch	no exit hatch
	Exit hatch is not possible in this size selection.
glazing	
heat transition coefficient [W/(m ² K)]	1.0 - 1.1
glazing type	heat insulant glass
transparency	clear
light transmittance, energy permeability, Ug-value	69 %, 48 %, 1.0 W/(m ² K)
alarm loop	no
shading	no
color selection	
colour assignment outside	selection
colour range	grey
frame colour	RAL 7016 anthracitegrey
internal colour deviant	no
UPSTAND	
type of upstand	GRP upstand
height [cm]	30
features	
better heat insulation upstand	no
suspension lip for storage of the roof line	no
PVC rail	no
heat insulated foot flange	no
DRIVE	
type of drive	without
YOUR CONFIGURATION HAS THE FOLLOWING QUALITIES	
OKD width	100 cm
OKD length	200 cm
LM width	82 cm
LM length	182 cm
height of upstand	30 cm
thermal transmission Ug	ca. 1.0 W/(m ² K)
noise insulation level Rw,p	ca. 38 dB
light transmission τ	ca. 69 %
total energy transmission g	ca. 48 %

Technical Information

GLASS SKYLIGHT FE 3°




Product Datasheet

Product-ID: FE 3° W106 100/200 K30 LR RAL7016 S 0,68 SS LOD500

Attribute	Value
snow load	0.68 kN/m ² (assumption; basis for dimensioning)
product standard	EN 1873-2
fall-through protection	fall-through proof (according to GS BAU 18)
construction material class upstand	E (according to EN 13501-1)
construction material class glazing	A1 (according to EN 13501-1)
hail resistance class	HW5 (according to VKF standard)
NOTE! After checking the local conditions, the design of the glazing and the drive may have to be adjusted.	

Dimensional Drawing

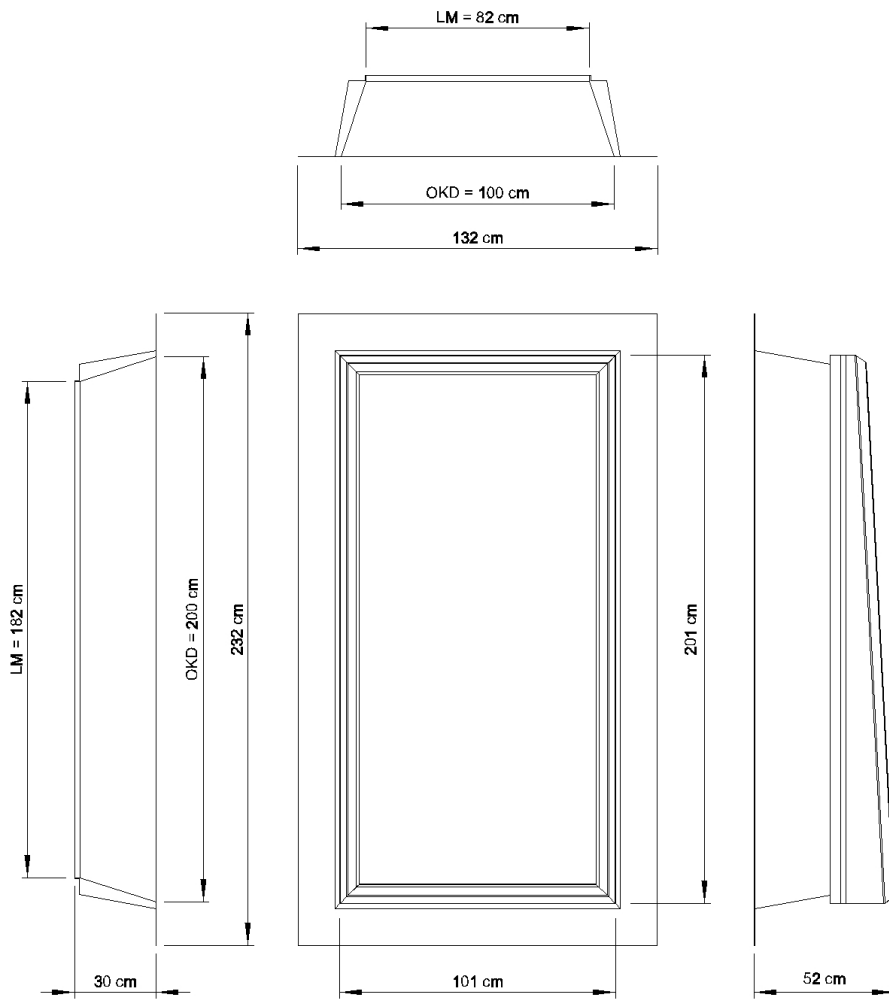

Attachments

Double-click a paperclip icon to open a file, or right-click to save it.