


3D-View

Turnable and zoom can be activated in Adobe Acrobat Reader under Windows

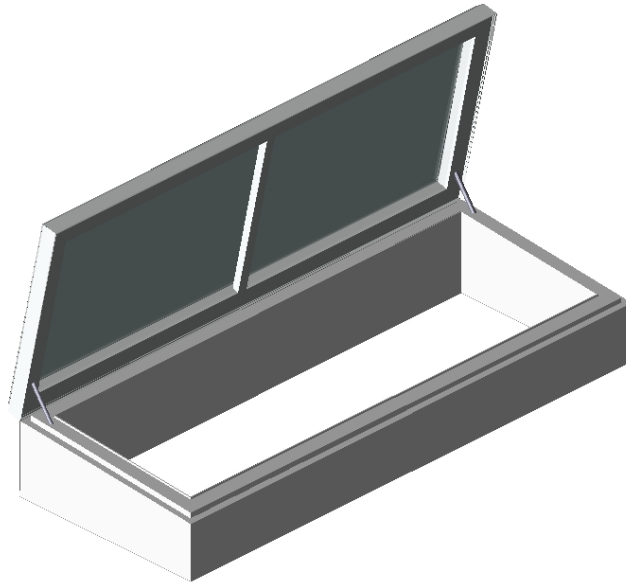

Edit configuration


This configuration can be edited using the following link:

[Open in configurator](#)

Product Features

| Attribute | Value |
|---|--|
| FLAT ROOF EXIT COMFORT SWING | |
| product ID | FE5° SwingLINKS 0.6 Clima ESG 100/300 RAL9016 K40-5 LS S 0.68 LOD500 |
| level of detail | LOD 500 |
| | lower LOD value = simplified selection and reduced geometry |
| show upper part open | yes |
| UPPER PART | |
| open side | left open |
| order size, top roof edge size (OKD) [cm] | 100 / 300 |
| emergency power supply | no |
| note! | Emergency power supply for second escape route, no SHEV! |
| glazing | |
| type of glazing | heat insulant glass |
| transparency | clear |
| alarm loop | no |
| shading | no |
| color selection | |
| colour assignment outside | selection |
| colour range | standard (RAL 9016) |
| internal colour deviant | no |
| DRIVE | |
| type of drive | 24 V |
| YOUR CONFIGURATION HAS THE FOLLOWING QUALITIES | |
| OKD length | 300 cm |
| OKD width | 100 cm |
| voltage | 24 V |
| thermal transition U_g | ca. 0.6 W/(m ² K) |
| noise insulation level $R_{w,p}$ | ca. 39 dB |
| light transmission τ | ca. 72 % |
| energy transmission g | ca. 51 % |
| snow load | 0.68 kN/m ² (assumption and basis of interpretation) |
| product standard | EN 1873-2 |
| fall-through protection | fall-through proof (according to GS BAU 18) |
| construction material class upstand | E (according to EN 13501-1) |
| construction material class glazing | A1 (according to EN 13501-1) |
| hail resistance class | HW5 (according to VKF standard) |
| NOTE! After checking the local conditions, the design of the glazing and the drive may have to be adjusted. | |

Dimensional Drawing

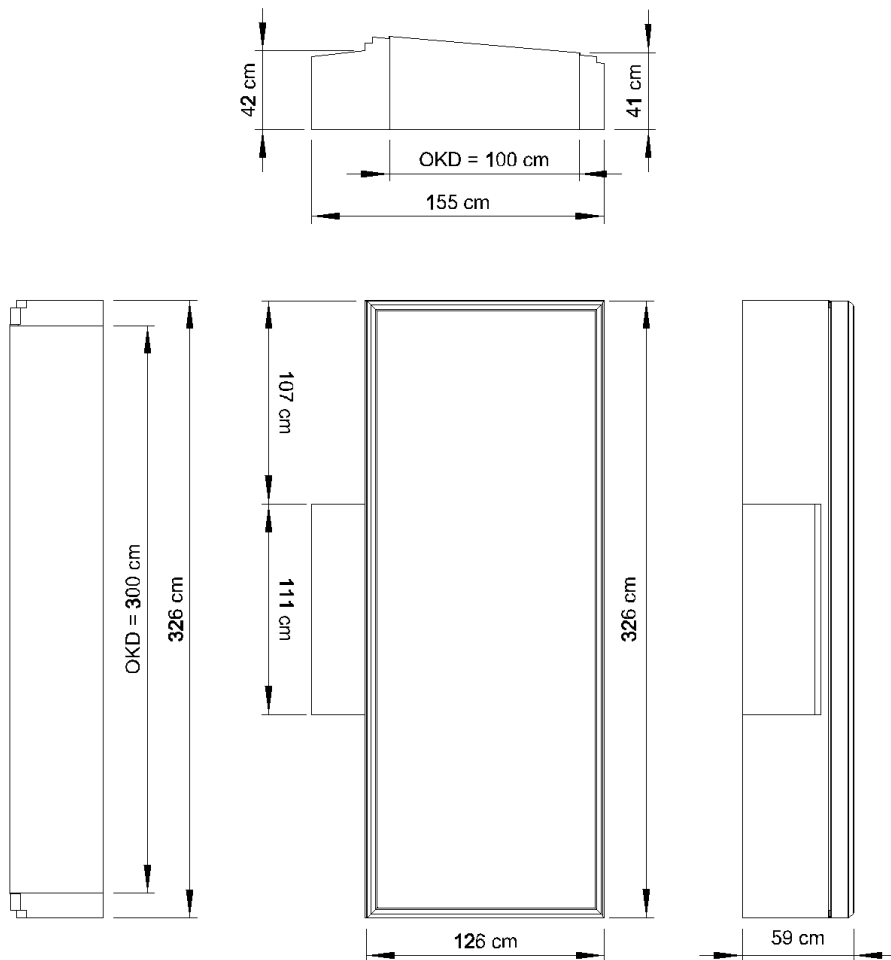

Attachments

Double-click a paperclip icon to open a file, or right-click to save it.