


3D-View

Turnable and zoom can be activated in Adobe Acrobat Reader under Windows

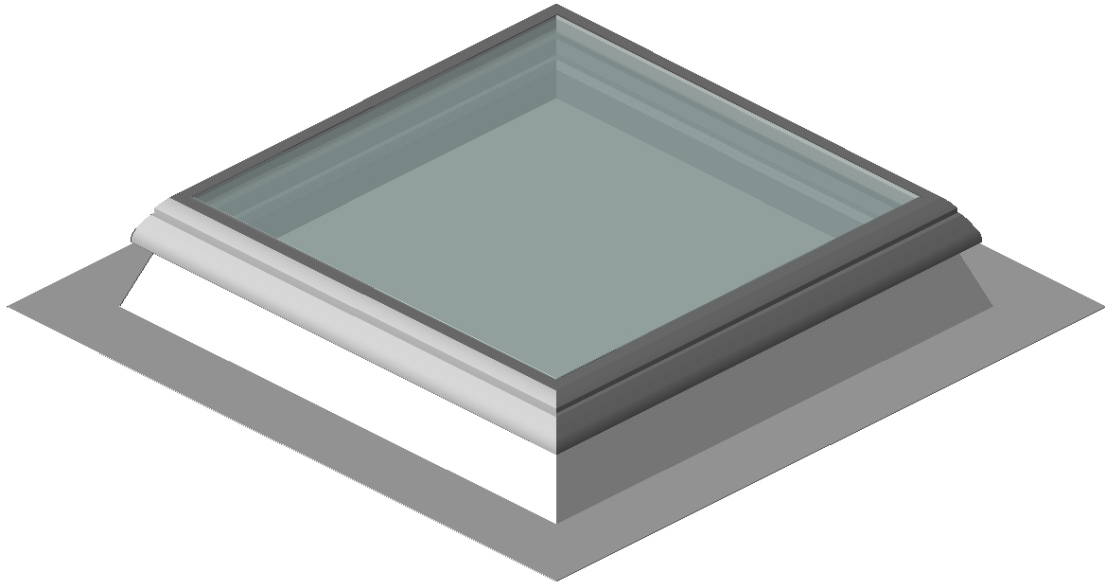

Edit configuration


This configuration can be edited using the following link:

[Open in configurator](#)

Product Features

Attribute	Value
GLASS SKYLIGHT F100	
product ID	F100SG W102 100/100 K15 LR SS S 0.68 LOD500
level of detail	LOD 500
	lower LOD value = simplified selection and reduced geometry
UPPER PART	
order size, top roof edge size (OKD) [cm]	100 / 100
clear dimension (LM) [cm]	82 / 82
exit hatch	no exit hatch
glazing	
heat transition coefficient	1.1
colouring	clear
glazing type	heat insulation glass
shading	no
UPSTAND	
type of upstand	GRP upstand
height [cm]	15
features	
better heat insulation upstand	no
suspension lip for storage of the roof line	no
PVC rail	no
DRIVE	
type of drive	without
YOUR CONFIGURATION HAS THE FOLLOWING QUALITIES	
OKD width	100 cm
OKD length	100 cm
LM width	82 cm
LM length	82 cm
height of upstand	15 cm
thermal transition U_g	ca. 1.1 W/(m ² K)
noise insulation level $R_{w,p}$	ca. 38 dB
light transmission τ	ca. 80 %
energy transmission	ca. 57 %
snow load	0.68 kN/m ² (assumption and basis of interpretation)
product standard	EN 1873-2
fall-through protection	fall-through proof (according to GS BAU 18)
construction material class upstand	E (according to EN 13501-1)
construction material class glazing	A1 (according to EN 13501-1)
hail resistance class	HW5 (according to VKF standard)
NOTE! After checking the local conditions, the design of the glazing and the drive may have to be adjusted.	

Dimensional Drawing

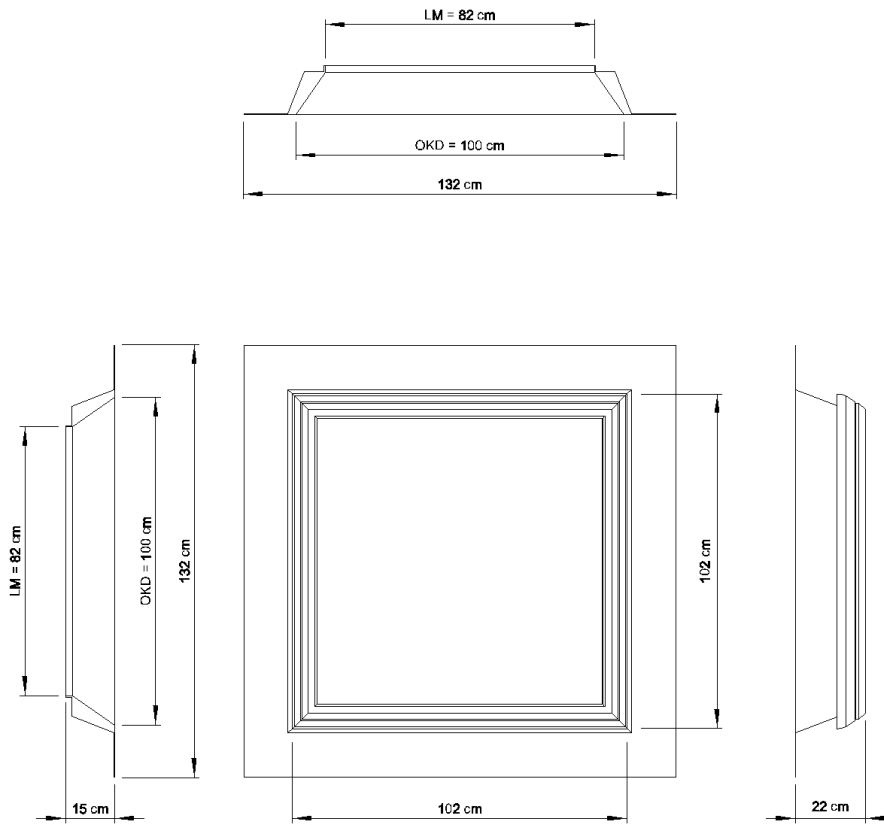

Attachments

Double-click a paperclip icon to open a file, or right-click to save it.